


NobleSealant 250

LOW VOC Sealant and Seamer

www.noblecompany.com

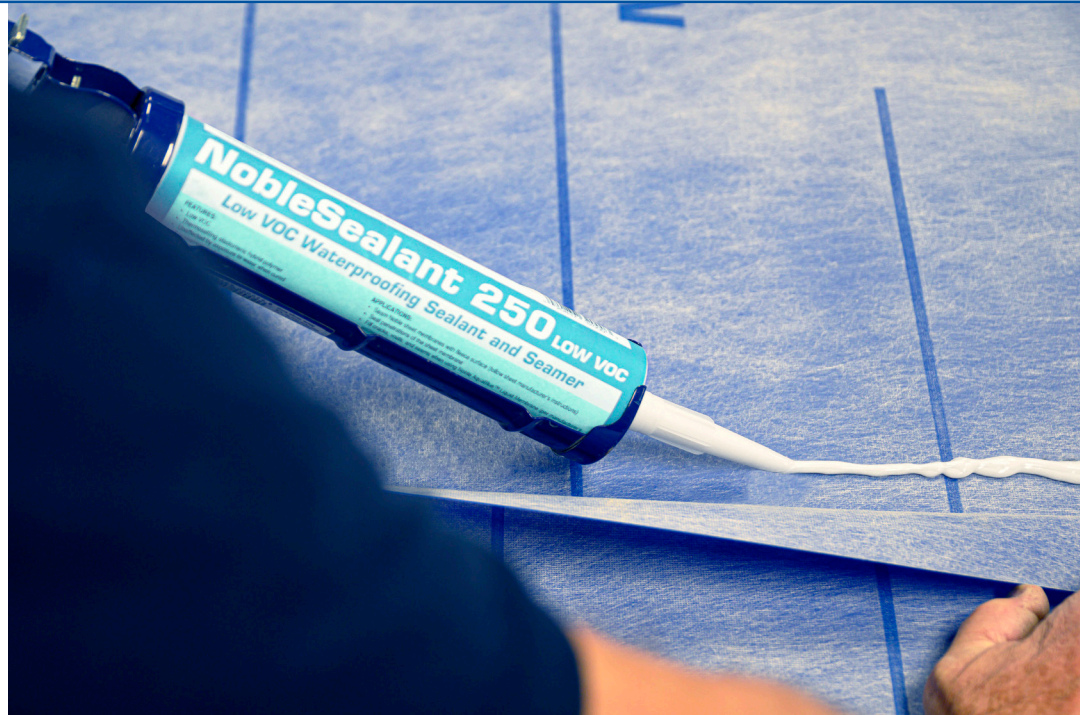

10.3 oz tube (Part No. 3200)
20 oz sausage tube (Part No. 3220)

NobleSealant 250

A low VOC product used for seaming and sealing. NobleSealant 250 is a thermosetting elastomeric hybrid polymer that is unaffected by water when cured. This material is a moisture cure product which can allow for flood testing in 30 minutes to 4 hours depending on environmental conditions.

- Low VOCs
- Thermosetting elastomeric hybrid polymer
- Unaffected by exposure to water when cured
- Seam Noble bonded sheet membranes (follow manufacturer's instructions)
- Seal penetrations of the sheet membrane (See Noble Technical Bulletin on patching)
- Fill small cracks, voids, and seams prior to using liquid waterproofing membranes (per manufacturer's written instructions)
- Provide seal between waterproofing membrane and Noble drain body
- Adhere Thin-Line™ corners and NobleFlex® Drain Flashing to waterproofing membrane
- Can be used as sealant around Noble Curbs, Benches, and Niches.

Yield:

10.3 oz tube = approx 40 lineal feet

20 oz sausage tube = approx 80 lineal feet

VIEW MORE PRODUCT
DETAILS, VIDEOS,
AND DIAGRAMS ONLINE



7300 Enterprise Drive, Spring Lake, MI 49456 · (800) 878-5788 · www.noblecompany.com
© Registered Trademark of Noble Company™ Trademark of Noble Company © 2023 Noble Company

File # NS082023-09 | 09/23 | Supersedes NS022020-04

