

FreeStyle Thin-Bed Drain™

Low-Profile Shower Drains for Watertight Installations

www.noblecompany.com




C ®
FILE #7249



Chrome
#861 PVC | #961 ABS



Brushed Nickel
#862 PVC | #962 ABS



Oil Rubbed Bronze
#863 PVC | #963 ABS



Brushed Golden Nickel
#864 PVC | #964 ABS



Flat Black
#865 PVC | #965 ABS

FreeStyle Thin-Bed Drains

High-quality shower drains that create a mechanical connection with the waterproofing sheet membrane. Premium components ensure dependable, long-term performance.

- Meets plumbing code requirements
- Ideal for wet areas like tiled showers
- Square strainers in various finishes
- Quality construction helps ensure performance
- Clamping ring provides waterproof integrity
- Weep slots and holes integrated in drain body maximize drainage
- Brass inserts in base minimize damage from over-tightening
- ABS (black) or PVC (white) drain bases available
- Stainless Steel clamping ring


Simple Solutions... Proven Performance


A division of
FEDERAL PROCESS
CORPORATION



VIEW PRODUCT
DETAILS, VIDEOS, AND
DIAGRAMS ONLINE



FreeStyle Thin-Bed Drain™

VIEW PRODUCT
DETAILS, VIDEOS, AND
DIAGRAMS ONLINE




HOW TO SPECIFY

The Noble Company FreeStyle Thin-Bed Drain should be used where necessary in drainage systems. Drain has a beveled flashing body/ adapter for subfloor installation. Clamping ring fastens to drain body with four stainless steel machine screws that thread into brass inserts. Drain body has a membrane flange and 2" Sch. 40 hub connection. Connection to DWV system shall be made with a solvent weld joint to PVC or ABS pipe. Drains are designed and tested in accordance with ASME A112.18.2-2015 / CSA B125.2-15.


SHAPE / FINISH	PART #	STRAINER LOAD RATING	STRAINER FLOW CAPACITY*	DRAIN BODY
Square Chrome Plated	861	300 lbs.	10 GPM	PVC
Square Brushed Nickel	862	300 lbs.	10 GPM	PVC
Square Oil Rubbed Bronze	863	300 lbs.	10 GPM	PVC
Square Brushed Golden Nickel	864	300 lbs.	10 GPM	PVC
Square Flat Black	865	300 lbs.	10 GPM	PVC
Square Chrome Plated	961	300 lbs.	10 GPM	ABS
Square Brushed Nickel	962	300 lbs.	10 GPM	ABS
Square Oil Rubbed Bronze	963	300 lbs.	10 GPM	ABS
Square Brushed Golden Nickel	964	300 lbs.	10 GPM	ABS
Square Flat Black	965	300 lbs.	10 GPM	ABS

INSTALLATION EXAMPLE

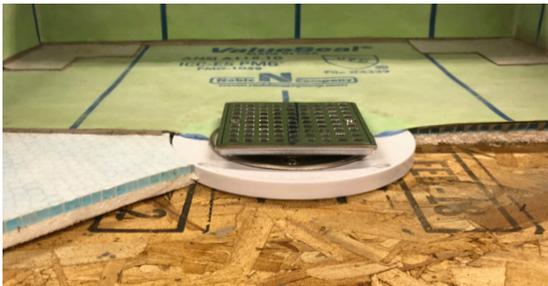

Installed in a thin-bed method shower with ValueSeal® waterproofing sheet membrane, and ProBase® II Multi-Slope Base.

Figure 1

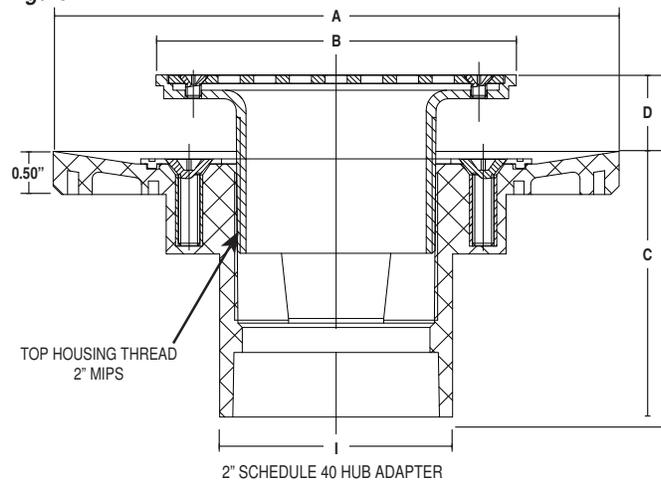

SIZE/DIMENSIONS (refer to Figure 1)

BASE DIAMETER (A)	STRAINER SIZE (B)	BASE DEPTH (C)	STRAINER HEIGHT MINIMUM (D)	ADJUSTMENT MAXIMUM (D)
6.50"	3.88" x 3.88"	3"	0.25"	1.25"



7300 Enterprised Drive, Spring Lake, MI 49456 · 800-878-5788 · Fax: 231-799-8850 · www.noblecompany.com
 © Registered Trademark of Noble Company™ Trademark of Noble Company © 2020 Noble Company
 File #FS012020-06 | 01/20 Supersedes #CFS072019-03